

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 951 151 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

20.10.1999 Bulletin 1999/42

(51) Int. Cl.<sup>6</sup>: H04B 7/005

(21) Application number: 99107576.3

(22) Date of filing: 15.04.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 16.04.1998 JP 10599098

(71) Applicant:

MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:

- Murakami, Yutaka  
Yokohama 230-0074 (JP)
- Orihashi, Masayuki  
Ichikawa-shi, Chiba-ken 272-0001 (JP)
- Matsuoka, Akihiko  
Yokohama, 226-0021 (JP)
- Sakawa, Morikazu  
Inagi-shi, Tokyo 206-0821 (JP)

(74) Representative:


Manitz, Finsterwald & Partner GbR  
Robert-Koch-Strasse 1  
80538 München (DE)

## (54) Pilot signal transmission technique and digital communication system using same

(57) In a digital communication system such as a mobile radio system, fading distortion is compensated with a raised precision. In a transmitter, pilot signals are regularly inserted in the information signals. The amplitude of the pilot signals are set larger than the maximum possible amplitude of the information signals. The modulation scheme of the pilot signals may be different from that of the information signals. In a receiver, the fading distortion of each of the pilot signals is determined. The fading distortions of the information signals are estimated by interpolation using the determined fading distortion of the pilot signal, and then compensated. The frequency band of each information signal is preferably limited with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

FIG. 3

16-APSK

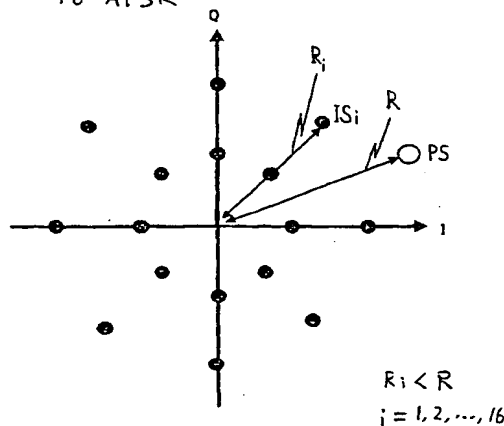

EP 0 951 151 A2

## Description

BACKGROUND OF THE INVENTION

## 1. Field of the Invention

[0001] The invention relates to a digital communications system and more specifically to modulation methods facilitating fading distortion compensation that performs a quasi-synchronous detection using a pilot signal.

## 2. Description of the Prior Art

[0002] In a digital communications system, especially in a digital mobile radio system, the envelope of information signals or symbols is distorted (i.e., the phases and the amplitudes of information signals involves phase errors and amplitude errors) due to fading. The phase error of the received signal causes an error in the frequency of a local oscillator in the receiver. The error of the local oscillation frequency with respect to the carrier frequency is hereinafter referred to as a "frequency offset". The phase error (or frequency offset) and the amplitude error of the received signal have to be estimated and compensated for in the receiver.

[0003] A fading distortion compensation scheme using a pilot signal is described by S. Sampei, "Rayleigh Fading Compensation Method for 16-QAM MODEM in Digital Land Mobile Radio Systems," Trans. IEICE (The Institute of Electronics, Information and Communication Engineers) Japan, Vol. J72-B-II, No. 1, January 1989, pp. 7-15 (which is hereby incorporated by reference). FIG. 1 is a diagram showing a signal constellation used in this 16-QAM system. In FIG. 1, small black-filled circles indicate 16 signal points in an in-phase (I) and quadrature-phase (Q) plane. One of the signal points with the maximum amplitude, that is, any of the signal points A, B, C and D is assigned to a pilot signal. (Since one of the 16 signal points in the signal constellation is used for a pilot signal, the remaining 15 points are available for the information signals.) A pilot signal is inserted in every frame or every N-1 information symbols (assuming that N symbols constitute one frame) in a transmitter. The estimation and compensation of distortions (due to fading) of information signals or symbols are achieved by interpolation using the pilot signals.

[0004] In such quasi-synchronous detection as just described, larger-amplitude pilot symbols yields a higher precision in estimation of the frequency offset and the amplitude error of the information signals, which results in an improvement of the bit error rate, which is a function of the ratio of the carrier signal power to the noise power density per one symbol.

However, enlarging the amplitude of the pilot signals without taking any measure lowers the power efficiency of the power amplifier of the transmitter system due to an increase in the ratio of the peak to the average transmission power.

[0005] It is therefore an object of the invention to provide a method of and a system for compensating for fading distortion of the received signal with a raised precision and thereby to provide a digital communication system that permits a reception of a reduced bit error rate.

SUMMARY OF THE INVENTION

[0006] In accordance with the principles of the invention, a point that differs in phase from any of the signal points for possible information symbols and that is larger in amplitude than any of the signal points is selected for a pilot signal point in a signal constellation (or a signal point map plotted on a in-phase and quadrature-phase plane). A pilot signal is inserted in every frame or every predetermined number of information signals.

[0007] In a receiver, the fading distortion of each of the pilot signals regularly inserted in the received signals is determined. The fading distortions of the information signals are estimated by interpolation using the determined fading distortion of the pilot signal, and then compensated for.

[0008] In a preferred embodiment, the amplitude of the pilot signal is set not larger than 1.6 times a maximum possible amplitude of the information signals.

[0009] The frequency band of each information signal is preferably limited with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

BRIEF DESCRIPTION OF THE DRAWING

[0010] The features and advantages of the present invention will be apparent from the following description of an exemplary embodiment of the invention and the accompanying drawing, in which:

FIG. 1 is a diagram showing a signal constellation used in this 16-QAM system;  
FIG. 2 is a schematic block diagram showing a part of an illustrative embodiment of a mobile telephone terminal that incorporates a fading distortion compensation system in accordance with the principles of the invention;

FIG. 3 is a diagram of an exemplary signal constellation for 16-APSK (amplitude phase shift keying) used in a first example;

FIG. 4 is a diagram showing a symbol stream transmitted in a digital communication system that serves the mobile telephone terminal 1 of FIG. 1; and

FIGs. 5 through 8 are signal constellations for  $m$ -QAM, 16-QAM, 8-PSK and QPSK according to the principles of the invention.

[0011] Throughout the drawing, the same elements when shown in more than one figure are designated by the same reference numerals.

# DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] FIG. 2 is a schematic block diagram showing a part of an illustrative embodiment of a mobile telephone terminal 1 that incorporates a fading distortion compensation system in accordance with the principles of the invention. A transmission system (shown in upper part of FIG. 2) of the mobile telephone terminal 1 includes a serial-to-parallel (S/P) converter 10; a base band signal generator 20 having its input connected with a converter 10 output; a pilot (or frame) signal inserter 110 having its in-phase (I) input and quadrature-phase (Q) input connected with respective outputs of the base band signal generator 20; low pass filters (LPF) 30 having their inputs connected with pilot signal inserter 110 outputs; a radio transmitter portion 40 having its I and Q inputs connected with I and Q LPF 30 outputs, respectively; an antenna duplexer 50 having transmission input connected with the transmitter portion 40 output; and an antenna 60 used for both transmission and reception. A reception system (shown in lower part of FIG. 2) of the mobile telephone terminal 1 includes a radio receiver portion 70 having its input connected with a duplexer 50 reception output; LPFs 80 having their input connected with radio receiver portion 70 I and Q outputs; a fading distortion compensator 100 having its I and Q inputs connected with respective LPF 80 outputs; and a decision maker 90, having its input connected with a compensator 100 output, for providing received data. The fading distortion compensator 100 includes a phase error estimator 120, an amplitude error estimator 130 and a phase and amplitude compensator 140. The mobile telephone terminal 1 further includes a controller 170 for controlling overall operation of the terminal 1.

[0013] In transmission operation, binary data is supplied in the form of a bitstream to the S/P converter 10. The S/P converter 10 converts the serial binary data into a parallel data of a predetermined number of bits. The base band signal generator 20 generates an in-phase (I) and quadrature-phase (Q) components or signals for a symbol associated with the parallel data.

[0014] FIG. 3 is a diagram of an exemplary signal constellation for 16-APSK (amplitude phase shift keying) used in a first example. FIG. 4 is a diagram showing an operation of the pilot signal inserter 110 of FIG. 3. In FIGs. 3 and 4 and the following figures of signal communications, small black-filled circles indicate information symbols and small white-filled circles indicate pilot (or frame) symbols.

[0015] In this specific example, the base band signal generator 20 generates I and Q components of one (IS<sub>i</sub>) of the 16 possible information symbols IS<sub>1</sub>, IS<sub>2</sub>, ..., IS<sub>P</sub> which is associated with each of the parallel data supplied to the generator 20, where  $i = 1, 2, \dots, P$ , and P is the number of possible information symbols (16 in this specific example) in the modulation scheme. The information symbol stream supplied from the base band signal generator 20 is shown in the upper part of FIG. 4.

[0016] The pilot signal inserter 110 inserts a pilot signal PS in every predetermined number of information symbols, say, N-1 symbols S<sub>1</sub>, ..., S<sub>N-1</sub> to make a frame of N symbols S<sub>0</sub>, S<sub>1</sub>, ..., S<sub>N-1</sub> as shown in FIG. 4. In each frame of the symbol stream output from the pilot signal inserter 110,

$$S_j = \begin{cases} PS & \text{for } j = 0 \\ IS_i & \text{for } j = 1, 2, \dots, N-1. \end{cases} \quad \dots \dots \dots (1)$$

[0017] It is seen from FIG. 3 that the pilot signal PS (=S<sub>0</sub>) is preferably disposed so as to make an angle of  $\pi/8$  with adjacent information signal points. Thus, the pilot signal PS = (PS<sub>I</sub>, PS<sub>Q</sub>) is preferably set to any of the following points:

$$PS_I = R \cdot \cos\left(\frac{i\pi}{4} + \frac{\pi}{8}\right)$$

$$PS_Q = R \sin\left(\frac{i\pi}{4} + \frac{\pi}{8}\right),$$

5 where  $i = 1, 2, \dots, 16$  and  $R$  is the amplitude of the pilot signal  $PS$ .

[0018] According to the invention, the amplitude  $R$  of the pilot signal  $PS$  is set larger than that of any information signal  $S_j$  ( $= |S_i|$ ),  $R_i$ , as shown in FIG. 3. Specifically, it is preferable to set the pilot signal amplitude  $R$  for a range larger than the maximum amplitude  $R_{max}$  of the information symbols and not larger than 1.6 times the maximum amplitude  $R_{max}$ , that is,

$$R_{max} < R \leq 1.6 \cdot R_{max}. \quad (2)$$

10 [0019] It is noted that each signal  $S_j$  is processed in the form of corresponding I and Q components  $S_{jI}$  and  $S_{jQ}$ . The signals  $S_j$  from the pilot signal inserter 110 is limited in frequency band by the LPFs 30. The LPFs 30 are preferably roll-off filters (or Nyquist filters) having the following characteristic:

$$H(\omega) = \begin{cases} 1 & \dots \omega \leq \omega_0(1 - \alpha) \\ \sqrt{\frac{1}{2} \left[ 1 - \sin \left( \frac{\pi}{2\alpha\omega_0} (\omega - \omega_0) \right) \right]} & \dots \omega_0(1 - \alpha) \leq \omega \leq \omega_0(1 + \alpha) \\ 0 & \dots \omega \geq \omega_0(1 + \alpha). \end{cases} \quad (3)$$

30 where  $H(\omega)$  is a amplitude characteristic of the roll-off filters 30,  $\omega$  is an angular frequency,  $\omega_0$  is a Nyquist angular frequency and  $\alpha$  is a roll-off coefficient. It is preferable to set the roll-off coefficient  $\alpha$  for a range from 0.1 to 0.4.

[0020] The filtered signals are modulated and amplified by the radio transmitter portion 40, and eventually transmitted via the duplexer 50 and the antenna 60. In reception operation, the I and Q components of the received signals

35 [0021] received by the antenna 50, the duplexer 60 and the radio receiver portion 70 is filtered by the LPFs 80 and supplied to the phase error estimator 120, the amplitude error estimator 130 and the phase and amplitude compensator 140. The phase error estimator 120 provides an estimated phase error signal to the compensator 140. The amplitude error estimator 130 provides, to the compensator 140, an estimated amplitude error signal for each information signal  $S_j$  ( $j=1, 2, \dots, N-1$ ) through interpolation using a pilot signal  $S_0$ . The phase and amplitude compensator 140 responsively compensates each information signal by using the estimated phase and amplitude error signals to provide compensated I and Q components. The decision maker 90 provides data associated with the compensated I and Q components.

40 [0022] In this way, the invention enables the bit error rate to be reduced without influencing on the ratio of peak to average power at the amplifier (AMP) 44 in the radio transmission portion 40 because the precision in estimation of frequency and amplitude errors of the information signals is enhanced.

#### 45 Modification

[0023] Though the embodiment has been described in conjunction with the 16-APSK, the invention is applicable to any more-than-7-signal-point modulation scheme. Examples are presented for  $2^m$ -QAM (quadrature amplitude modulation) ( $m \leq 3$ ), 16-QAM, 8-PSK (phase shift keying) and QPSK (quadrature phase shift keying) in the following.

50 [0024] FIGs. 5 through 8 are signal constellations for  $2^m$ -QAM ( $m \leq 3$ ), 16-QAM, 8-PSK and QPSK according to the principles of the invention.

[0025] As for  $2^m$ -QAM as shown in FIG. 5, if the information signal points  $IS_i$  ( $i = 1, 2, \dots, 2^m$ ) are written as  $(IS_{iI}, IS_{iQ})$  in I-Q coordinates, the points are expressed as follows:

$$\begin{aligned} IS_{iI} &= s(2^{m-1}a_1 + 2^{m-2}a_2 + \dots + 2^0a_m) \\ IS_{iQ} &= S(2^{m-1}b_1 + 2^{m-2}b_2 + \dots + 2^0b_m) \end{aligned} \quad (4)$$

where  $s$  is a constant and each of  $a_k$  and  $b_k$  ( $k = 1, 2, \dots, m$ ) represents 1 and -1, i.e.,  $(a_k, b_k)$  represents four points (1, 1), (1, -1), (-1, 1) and (-1, -1). In this case, the pilot signal PS is disposed on either of the I and Q axes such that the amplitude (R) of PS is larger than that (Ri) of any possible symbol points. In the specific example of FIG. 5, the pilot signal is disposed on the positive range of the I axis.

5 [0026] In case of 16-QAM, the possible symbol points are expressed as follows:

$$ISi_I = s(2^1 a_1 + 2^0 a_2) \quad (5)$$

$$ISi_Q = s(2^1 b_1 + 2^0 b_2).$$

10

In this case, the pilot signal PS is preferably disposed on either of the I and Q axes such that the amplitude (R) of PS is larger than that (Ri) of any possible symbol points ISi as shown in FIG. 6

[0027] In case of 8-PSK as shown in FIG. 7, the possible signal points are expressed as:

15

$$ISi_I = r \cdot \cos(i\pi/4) \quad (6)$$

$$ISi_Q = r \cdot \sin(i\pi/4).$$

20

In this case, since the pilot signal PS is preferably disposed so as to make an angle of  $\pi/8$  with adjacent information points, the pilot signal PS = (PS<sub>I</sub>, PS<sub>Q</sub>) is preferably set to any of the following points:

$$PS_I = R \cdot \cos\left(\frac{i\pi}{4} + \frac{\pi}{8}\right)$$

25

$$PS_Q = R \cdot \sin\left(\frac{i\pi}{4} + \frac{\pi}{8}\right)$$

where  $k = 1, 2, \dots, 8$  and R is the amplitude of the pilot symbol that satisfy:

30

$$r < R \leq 1.6 \cdot r.$$

[0028] In case of QPSK as shown in FIG. 8, the possible signal points are expressed as:

35

$$ISi_I = r \cdot \cos\left(\frac{\pi}{4} + \frac{i\pi}{2}\right) \quad (7)$$

$$ISi_Q = r \cdot \sin\left(\frac{\pi}{4} + \frac{i\pi}{2}\right).$$

40

In this case, since the pilot signal PS is preferably disposed so as to make an angle of  $\pi/4$  with adjacent information points, the pilot signal PS = (PS<sub>I</sub>, PS<sub>Q</sub>) is preferably set to any of the following points:

45

$$PS_I = R \cdot \cos\left(\frac{\pi}{2}(1+i)\right)$$

$$PS_Q = R \cdot \sin\left(\frac{\pi}{2}(1+i)\right).$$

50

[0029] Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

55

## Claims

1. A method of transmitting digital data by wireless so as to permit a reception in a reduced bit error rate in a digital

wireless communications system, the method including the steps of:

converting said digital data into a first stream of information signals through a more-than-7-signal-point modulation scheme;  
 inserting a pilot signal regularly in said first stream of said information signals into a second stream of said information signals and said pilot signal, an amplitude of said pilot signal being larger than that of any of said information signals; and  
 transmitting said second stream by wireless.

2. A method as defined in claim 1, wherein said step of inserting a pilot signal includes the step of setting said amplitude of said pilot signal not larger than 1.6 times a maximum possible amplitude of said information signals.
3. A method as defined in claim 1, further including the step of the transmitter limiting a frequency band of each information signal with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.
4. A method as defined in claim 1, wherein said more-than-7-signal-point modulation scheme is a 16-amplitude phase shift keying.
5. A method as defined in claim 4, wherein said step of inserting a pilot signal includes the step of generating said pilot signal so as to make an angle of  $\pi/8$  with adjacent information signals in an in-phase and quadrature-phase signal space.
6. A method as defined in claim 1, wherein said more-than-7-signal-point modulation scheme is a  $2^m$ -signal-point quadrature amplitude modulation, where m is a positive integer not smaller than 3.
7. A method as defined in claim 6, wherein said step of inserting a pilot signal includes the step of generating said pilot signal so as to be disposed on one of an in-phase axis and a quadrature-phase axis in a signal space of said  $2^m$ -signal point quadrature amplitude modulation.
8. A method as defined in claim 1, wherein said more-than-7-signal-point modulation scheme is an 8 phase shift keying.
9. A method as defined in claim 8, wherein said step of inserting a pilot signal includes the step of generating said pilot signal so as to make an angle of  $\pi/8$  with adjacent information signals in an in-phase and quadrature-phase signal space of said 8 phase shift keying.
10. A method of transmitting digital data by wireless so as to permit a reception in a reduced bit error rate, the method including the steps of:
 

converting said digital data into a first stream of information signals through a quadrature phase shift keying modulation;  
 inserting a pilot signal regularly in said first stream of said information signals into a second stream of said information signals and said pilot signal, an amplitude of said pilot signal being larger than that of any of said information signals; and  
 transmitting said second stream by wireless.
11. A method as defined in claim 10, wherein said pilot signal is so disposed as to make an angle of  $\pi/4$  with adjacent information signals in an in-phase and quadrature-phase signal space of said quadrature phase shift keying modulation.
12. A method as defined in claim 10, wherein said step of inserting a pilot signal includes the step of setting said amplitude of said pilot signal not larger than 1.6 times a maximum possible amplitude of said information signals.
13. A method as defined in claim 10, further including the step of limiting a frequency band of each information signal with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.
14. A system capable of transmitting digital data by wireless so as to permit a reception in a reduced bit error rate, the system including:

means for converting said digital data into a first stream of information signals through a more-than-7-signal-point modulation scheme;

means for inserting a pilot signal regularly in said first stream of said information signals into a second stream of said information signals and said pilot signal, an amplitude of said pilot signal being larger than that of any of said information signals; and

means for transmitting said second stream by wireless.

15. A system as defined in claim 14, wherein said inserting means includes means setting said amplitude of said pilot signal not larger than 1.6 times a maximum possible amplitude of said information signals.

16. A system as defined in claim 14, further including means for limiting a frequency band of each information signal with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

17. A system as defined in claim 14, wherein said more-than-7-signal-point modulation scheme is a 16-amplitude phase shift keying.

18. A system as defined in claim 17, wherein said pilot signal is so disposed as to make an angle of  $\pi/8$  with adjacent information signals in an in-phase and quadrature-phase signal space.

19. A system as defined in claim 14, wherein said more-than-7-signal-point modulation scheme is a  $2^m$ -signal-point quadrature amplitude modulation, where m is a positive integer not smaller than 3.

20. A system as defined in claim 19, wherein said pilot signal is disposed on one of an in-phase axis and a quadrature-phase axis in a signal space of said  $2^m$ -signal point quadrature amplitude modulation.

21. A system as defined in claim 14, wherein said more-than-7-signal-point modulation scheme is an 8 phase shift keying.

22. A system as defined in claim 21, wherein said pilot signal is so disposed as to make an angle of  $\pi/8$  with adjacent information signals in an in-phase and quadrature-phase signal space of said 8 phase shift keying.

23. A system capable of transmitting digital data by wireless so as to permit a reception in a reduced bit error rate, the system including:

means for converting said digital data into a first stream of information signals through a quadrature phase shift keying modulation;

means for inserting a pilot signal regularly in said first stream of said information signals into a second stream of said information signals and said pilot signal, an amplitude of said pilot signal being larger than that of any of said information signals; and

means for transmitting said second stream by wireless.

24. A system as defined in claim 23, wherein said pilot signal is so disposed as to make an angle of  $\pi/4$  with adjacent information signals in an in-phase and quadrature-phase signal space of said quadrature phase shift keying modulation.

25. A system as defined in claim 23, wherein said inserting means includes means setting said amplitude of said pilot signal not larger than 1.6 times a maximum possible amplitude of said information signals.

26. A system as defined in claim 23, further including means for limiting a frequency band of each information signal with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

27. A mobile telephone that communicates digital data with a reduced bit error rate, the mobile telephone comprising:

a transmission system; and

a receiver system, said transmission system including:

means for converting said digital data into a first stream of information signals through a more-than-7-signal-point modulation scheme;

means for inserting a pilot signal regularly in said first stream of said information signals into a second stream

**EP 0 951 151 A2**

of said information signals and said pilot signal, an amplitude of said pilot signal being larger than that of any of said information signals; and  
means for transmitting said second stream.

- 5    28. A mobile telephone as defined in claim 27, wherein said inserting means includes means setting said amplitude of said pilot signal not larger than 1.6 times a maximum possible amplitude of said information signals.
29. A mobile telephone as defined in claim 27, further including means for limiting a frequency band of each information signal with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

10

15

20

25

30

35

40

45

50

55



FIG. 1

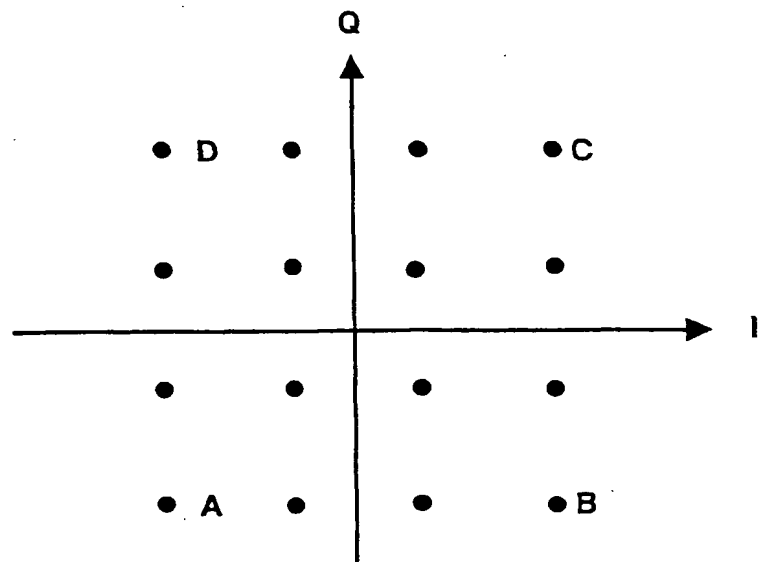


FIG. 2

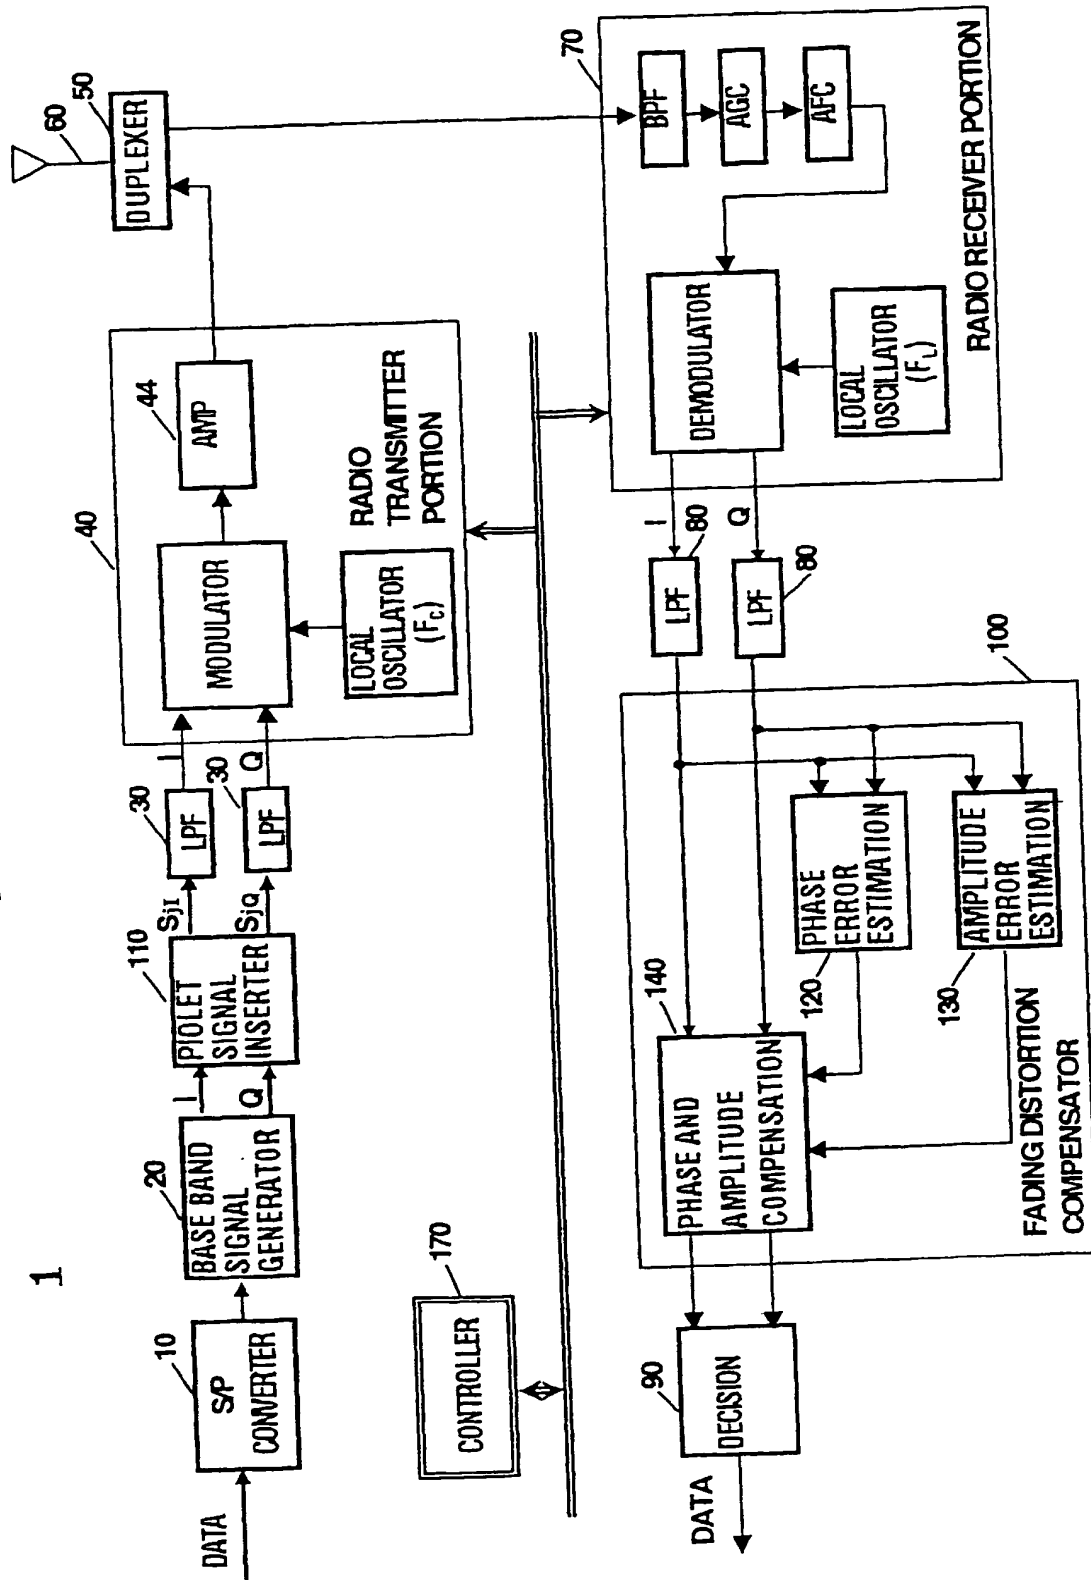
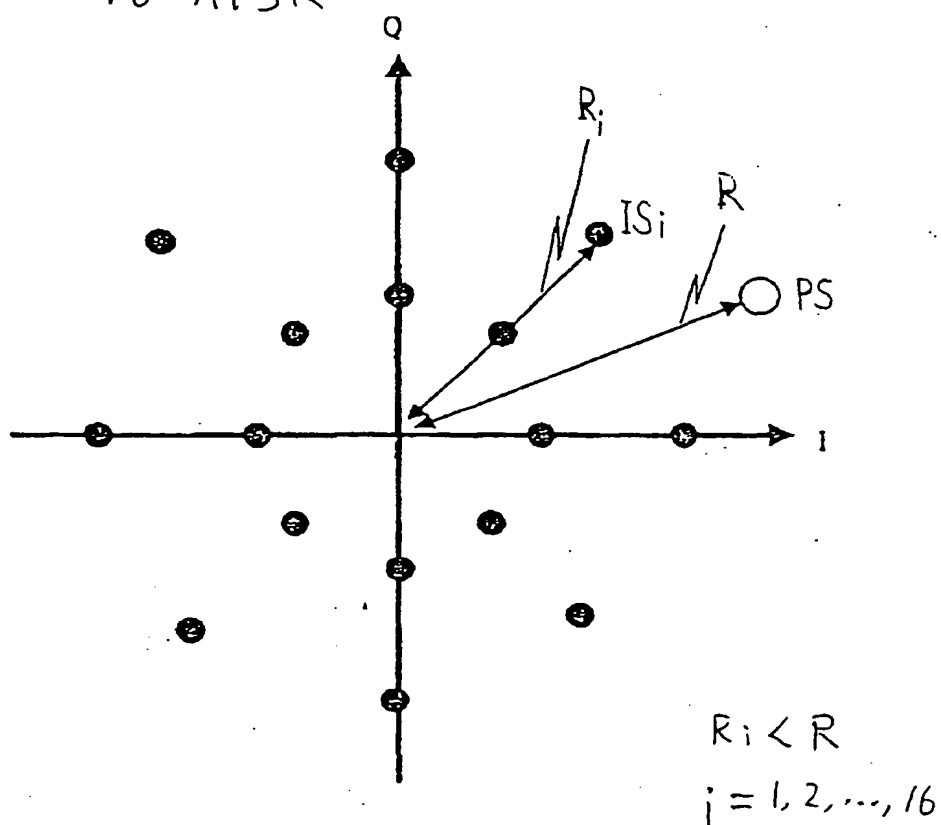


FIG. 3  
16-APSK



**FIG. 4**

## OPERATION OF THE PILOT SIGNAL INSERTER 110

- : INFORMATION SYMBOL (ISI)  $i = 1, 2, \dots, P$
- P: THE NUMBER OF POSSIBLE STATES
- : PIOLET (or FRAME) SYMBOL (PS)

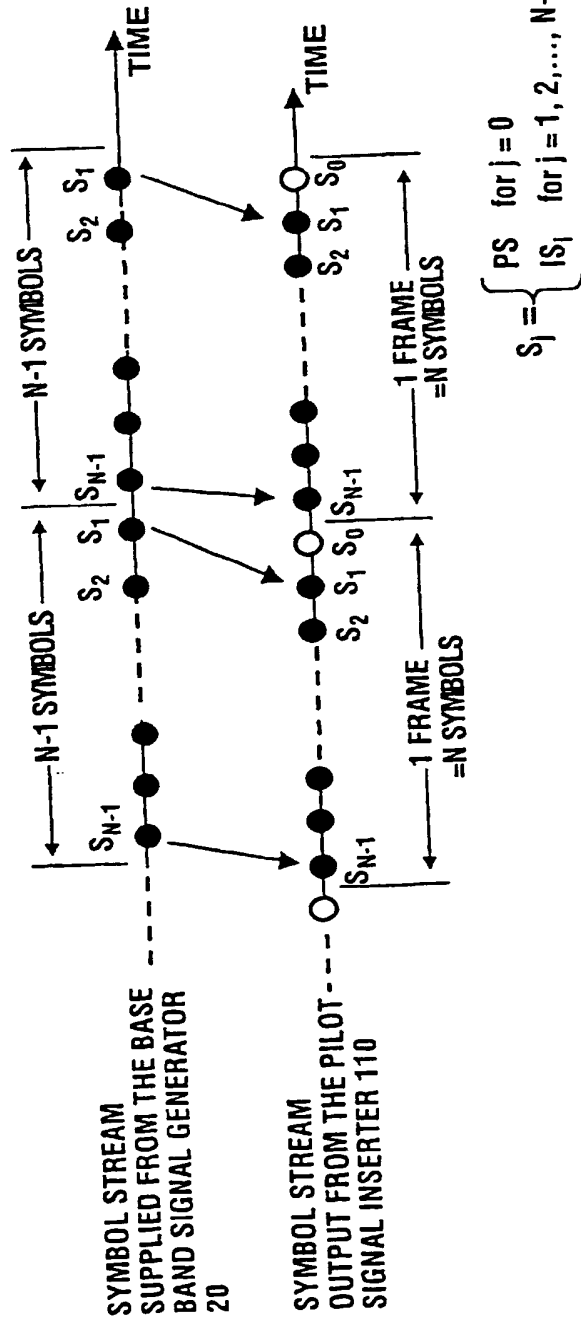


FIG. 5

$2^m$ -QAM

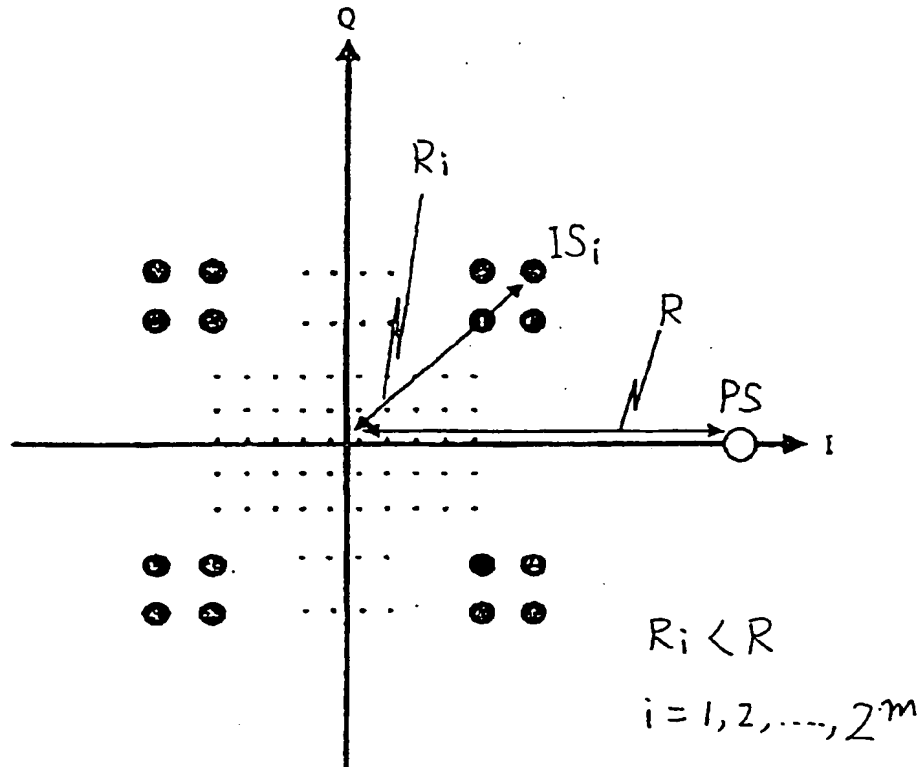


FIG. 6

16-QAM

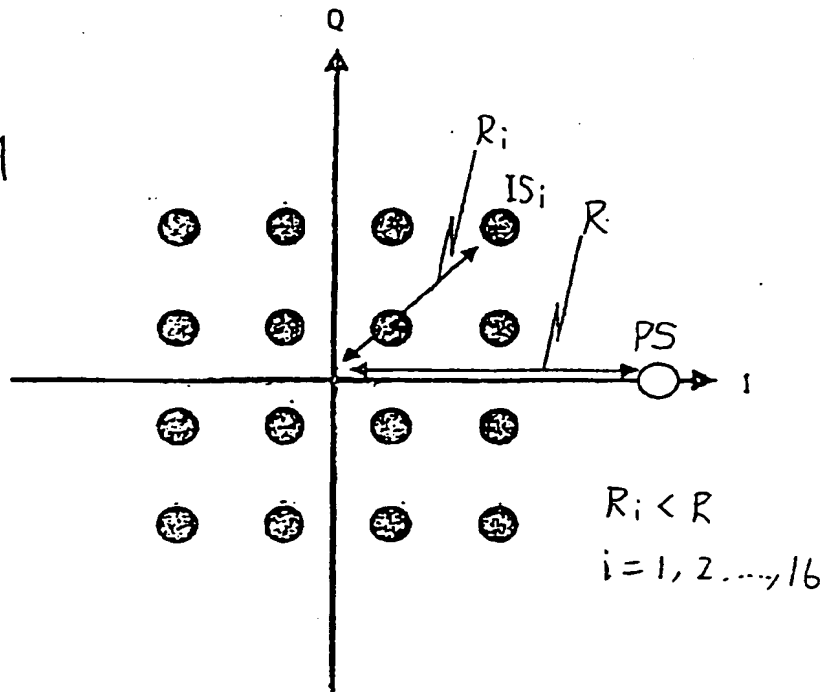


FIG. 7  
8-PSK



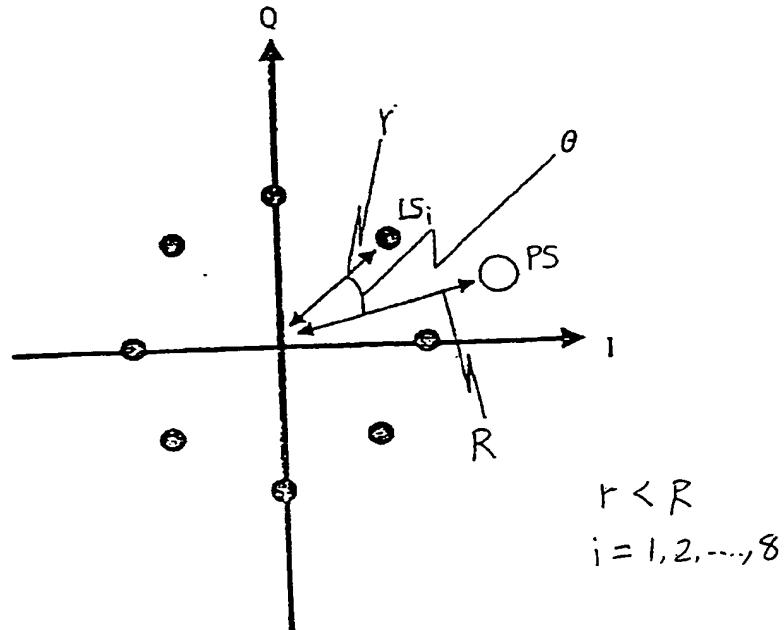


FIG. 8  
QPSK



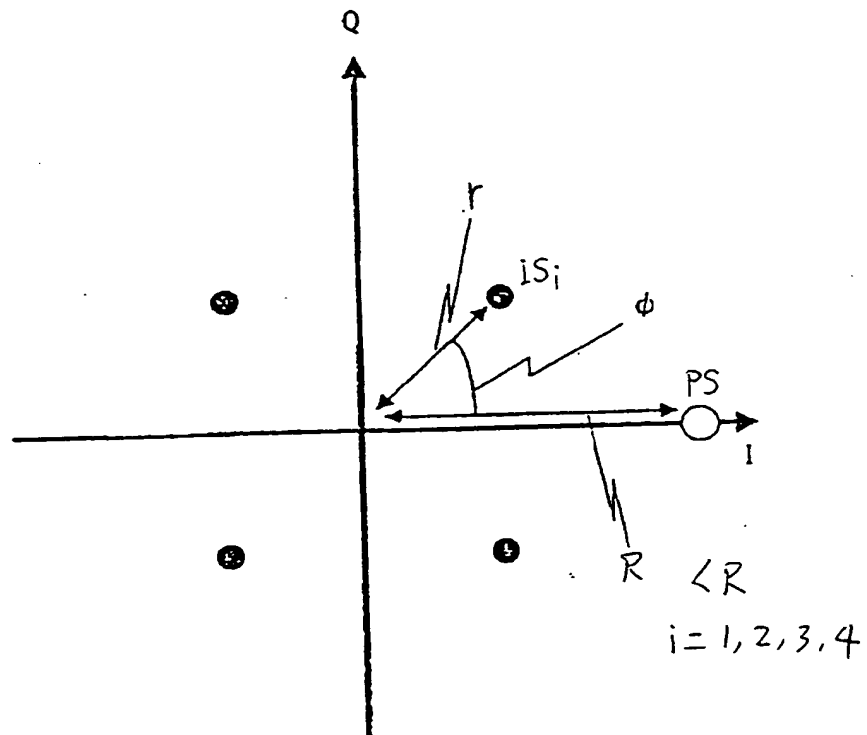

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 951 151 A3**

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
28.01.2004 Bulletin 2004/05

(51) Int Cl.7: **H04B 7/005, H04L 27/34**

(43) Date of publication A2:  
20.10.1999 Bulletin 1999/42

(21) Application number: **99107576.3**

(22) Date of filing: **15.04.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Orihashi, Masayuki  
Ichikawa-shi, Chiba-ken 272-0001 (JP)
- Matsuoka, Akihiko  
Yokohama, 226-0021 (JP)
- Sakawa, Morikazu  
Inagi-shi, Tokyo 206-0821 (JP)

(30) Priority: **16.04.1998 JP 10599098**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
Kadoma-shi, Osaka 571-8501 (JP)

(74) Representative:  
**Manitz, Finsterwald & Partner GbR**  
Martin-Greif-Strasse 1  
80336 München (DE)


(72) Inventors:  
• Murakami, Yutaka  
Yokohama 230-0074 (JP)

(54) **Pilot signal transmission technique and digital communication system using same**

(57) In a digital communication system such as a mobile radio system, fading distortion is compensated with a raised precision. In a transmitter, pilot signals are regularly inserted in the information signals. The amplitude of the pilot signals are set larger than the maximum possible amplitude of the information signals. The modulation scheme of the pilot signals may be different from that of the information signals. In a receiver, the fading distortion of each of the pilot signals is determined. The fading distortions of the information signals are estimated by interpolation using the determined fading distortion of the pilot signal, and then compensated. The frequency band of each information signal is preferably limited with a roll-off filter with a roll-off coefficient ranging from 0.1 to 0.4.

**FIG. 3**

16-APSK

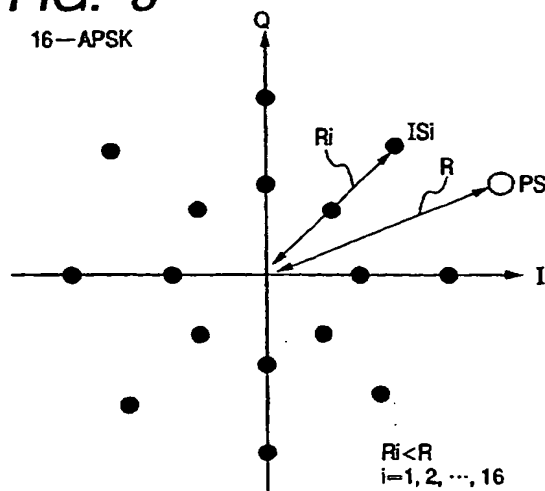

EP 0 951 151 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 10 7576

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 668 664 A (MATSUSHITA ELECTRIC IND CO LTD) 23 August 1995 (1995-08-23)	1-4,6,8, 10, 12-17, 19,21, 23,25-29	H04B7/005 H04L27/34
Y	* paragraph [0012] - paragraph [0013] *	5,7,9, 11,18, 20,22,24	
	* paragraph [0015] - paragraph [0018] *		
	* paragraph [0021] - paragraph [0022] *		
	* claim 6 *		
	* figure 5 *		
Y	US 5 712 877 A (HO PAUL K M ET AL) 27 January 1998 (1998-01-27)	5,7,9, 11,18, 20,22,24	
	* abstract *		
	* column 1, line 38 - column 1, line 62 *		
	* column 6, line 46 - column 6, line 62 *		
	* claims 8,20 *		
A	EP 0 810 743 A (NIPPON ELECTRIC CO) 3 December 1997 (1997-12-03)	1-29	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04L H04B
	* abstract *		
	* column 5, line 3 - column 5, line 52 *		
	* column 13, line 37 - column 16, line 14 *		
	* figure 4 *		
A	WO 98 12678 A (NOKIA TELECOMMUNICATIONS OY ;JOKINEN HARRI (FI); POSTI HARRI (FI);) 26 March 1998 (1998-03-26)	1-29	
	* page 1, line 15 - page 2, line 11 *		
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 3 December 2003	Examiner Fernández Cuenca, B
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document	

EPO FORM 1503 (03.02) (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 10 7576

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-12-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0668664	A	23-08-1995	JP	2802582 B2	24-09-1998
			JP	7221700 A	18-08-1995
			JP	7226710 A	22-08-1995
			CA	2139919 A1	01-08-1995
			DE	69512693 D1	18-11-1999
			DE	69512693 T2	06-04-2000
			DE	69527317 D1	08-08-2002
			DE	69527317 T2	24-10-2002
			DE	69531875 D1	06-11-2003
			EP	0668664 A1	23-08-1995
			EP	0928074 A2	07-07-1999
			EP	0928075 A2	07-07-1999
			US	RE37870 E1	08-10-2002
			US	5559789 A	24-09-1996
-----					
US 5712877	A	27-01-1998	NONE		
-----					
EP 0810743	A	03-12-1997	JP	2785804 B2	13-08-1998
			JP	9321699 A	12-12-1997
			AU	716608 B2	02-03-2000
			AU	2368697 A	04-12-1997
			CA	2206365 A1	30-11-1997
			CN	1447548 A	08-10-2003
			CN	1167411 A ,B	10-12-1997
			EP	0810743 A2	03-12-1997
			KR	270822 B1	01-11-2000
			US	6088324 A	11-07-2000
-----					
WO 9812678	A	26-03-1998	FI	963698 A	19-03-1998
			AU	727513 B2	14-12-2000
			AU	4304397 A	14-04-1998
			CN	1231110 A ,B	06-10-1999
			EP	0976277 A2	02-02-2000
			WO	9812678 A2	26-03-1998
			JP	2001500700 T	16-01-2001
			NO	991293 A	17-03-1999
			US	6639908 B1	28-10-2003
-----					

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page Blank (uspto)**

---